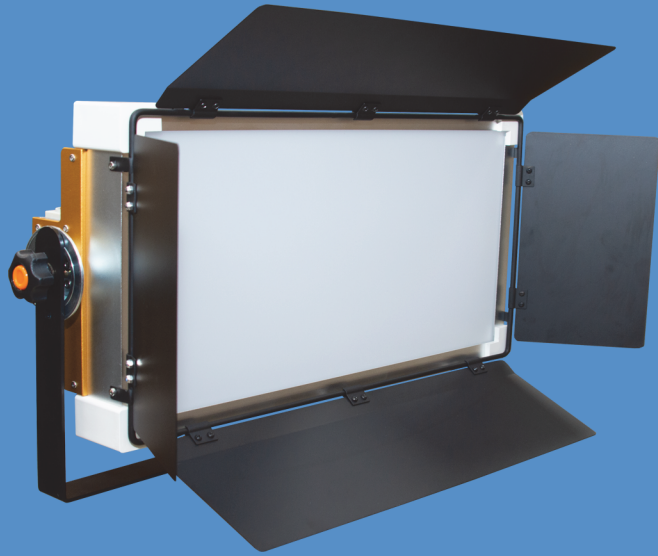


ALL
LIGHT

5



Matrix  Light



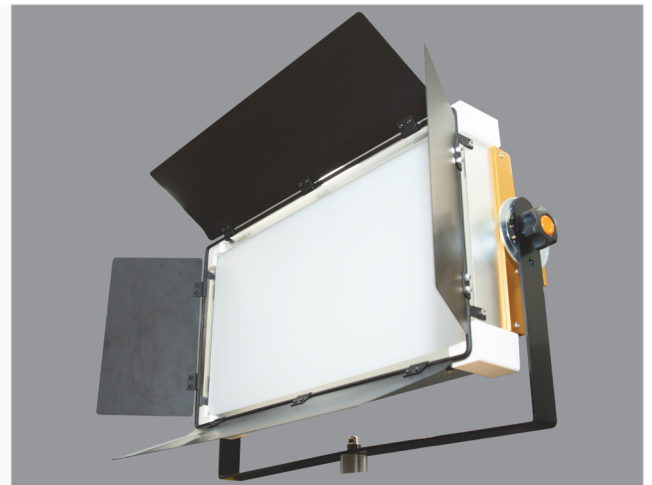
Hi Five !! ALL LIGHT 5

Smart Choice / Ultra-High Color Accuracy (CRI 97+)

Optimal Balance of Quality and Value

All Light 5 is a professional LED lighting solution designed and engineered with a clear mission: to provide exceptional value and ease of use in studio and broadcast environments. By focusing on the essential features required on-set, we empower users to bring their creative vision to life with unparalleled precision.

Engineered to minimize shifts in light characteristics caused by temperature changes, All Light 5 delivers consistent, high-quality illumination. With an ultra-high CRI of 97, it offers the reliable, true-to-life color reproduction that professionals demand.



Simple & Intuitive Control

Featuring an intuitive user interface, the ML-AL5 LED Light provides rapid access to all menus, ensuring a seamless and convenient user experience.

Optimal Balance of Quality and Value

Compliant with the standard DMX-512 protocol, the ML-AL5 offers seamless compatibility with traditional lighting consoles. Supporting both 8-bit and 16-bit control, it enables precise and detailed adjustments across a wide range of production scenarios.

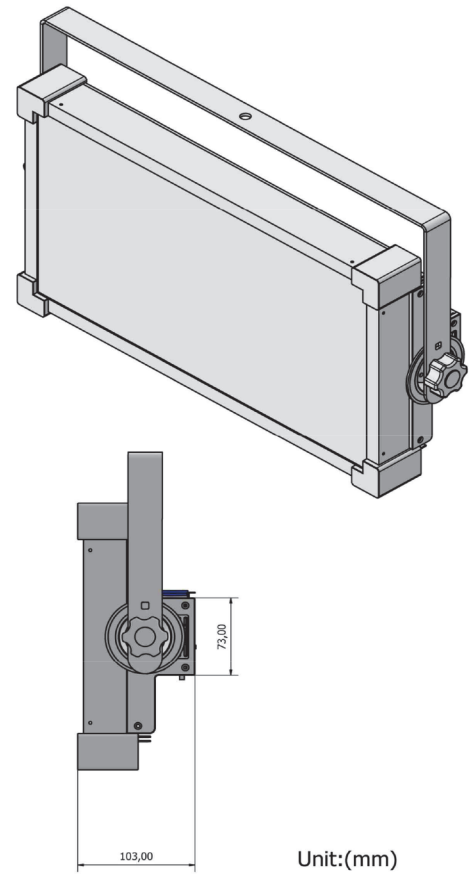
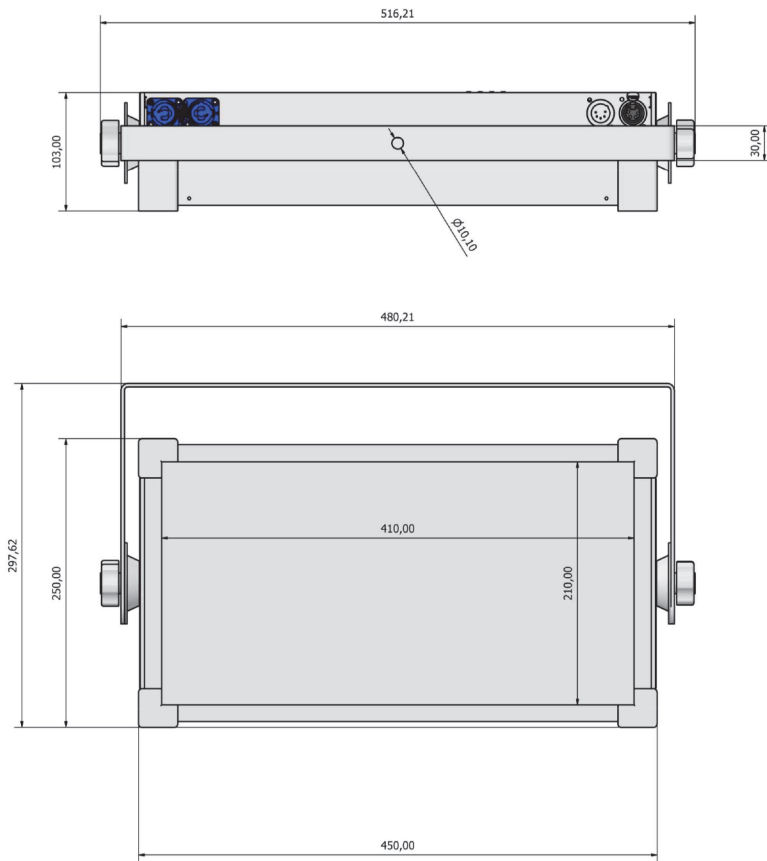
Product specifications

Lamp Head	
Optical System	Soft Diffusion Panel
Light Aperture	ML-AL5: 410 x 210 mm / 16.1 x 8.3"
Beam Angle	115° (Half Peak Angle)
Weight	4.7kg/10.4lbs
Handling	Steel Yoke, High Strength Tilt Lock, Pole Operation Option (Pan & Tilt)
Mounting	16 mm / 28 mm Combo Pin (Baby 5/8" / Junior 1-1/8" Combo Pin)
Tilt Angle	+/- 90°
Lamphead Voltage Input	48V DC
Power Consumption	48V DC / 4.8A / 150 W Nominal, 230 W Maximum
Lamphead Power Connection	Male 3-Pin Power Con - 15 Amp (Pin 1: Negative / Pin 2: Positive / Pin 3: Ground)
White Light (ML-AL5B Color Model Only)	2,800 K to 5,600 K continuously variable correlated color temperature 5,600K Cool White Only (For ML-AL5A Model)
Color Temperature Tolerance	+/- 400 K (nominal)
Color Rendition	CRI Average > 97 TLCI Average > 95
Dimming	0 to 100 % continuous
Control	On-Board Controller, 3-Pin DMX In and Through
Housing Color	Orange / Silver, Black, White
Ambient Temperature Operation	-20 to +45° C (-4 to +113° F)
Protection Class / IP Rating	III / IP20
Estimated LED Lifetime (L70)	50,000 hours
Estimated Color Shift Over Lifetime (CCT)	+/- 5 %

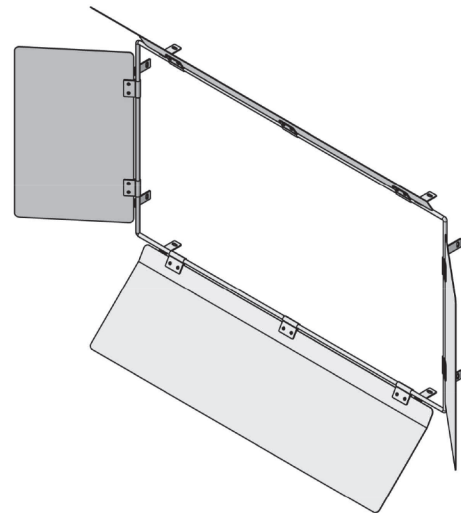
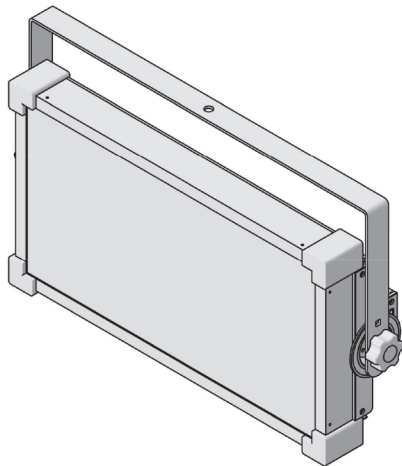
Power Supply Unit	
Power Supply Input Range	180 to 240 V ~, 50/60 Hz
Power Supply Output Range	48V DC / 4.8A
Power Input Connection	PowerCON TRUE1 (Bare Ends / Schuko / Edison cables available)
Weight	4.7Kg/10.4lbs
Dimensions	450 x 250 x 103 mm / 17.7 x 9.8 x 4.0"
Control	On-Board On/Off Switch

Photometric Data

	3 m / 9.8 ft		5 m / 16.4 ft		7 m / 23 ft		9 m / 29.5 ft	
All Light 1	3,200 K	5,600 K	3,200 K	5,600 K	3,200 K	5,600 K	3,200 K	5,600 K
All Light 5 with Standard Diffusion	550 lx 51 fc	550 lx 51 fc	240 lx 22 fc	230 lx 22 fc	125 lx 12 fc	125 lx 12 fc	80 lx 7 fc	80 lx 7 fc

Product Dimension

What's in the Box: ML –AL5 LED Light, ML –PC5 Power Cable, ML –BD5 Barn Door

**Contact Informations**

Matrix Light Co., Ltd.
F314, F315, F316 Goyang ArcBiz Knowledge Industry Complex
63, Samwon-ro 1-gil, Deogyang-gu, Goyang-si, Gyeonggi-do,
Republic of Korea

+82-10-7232-2888
csmatrixlight@gmail.com
www.matrixlight.com

Authorized Dealer