



POWER
SUPPLY

ML-MPS1

For StarLink

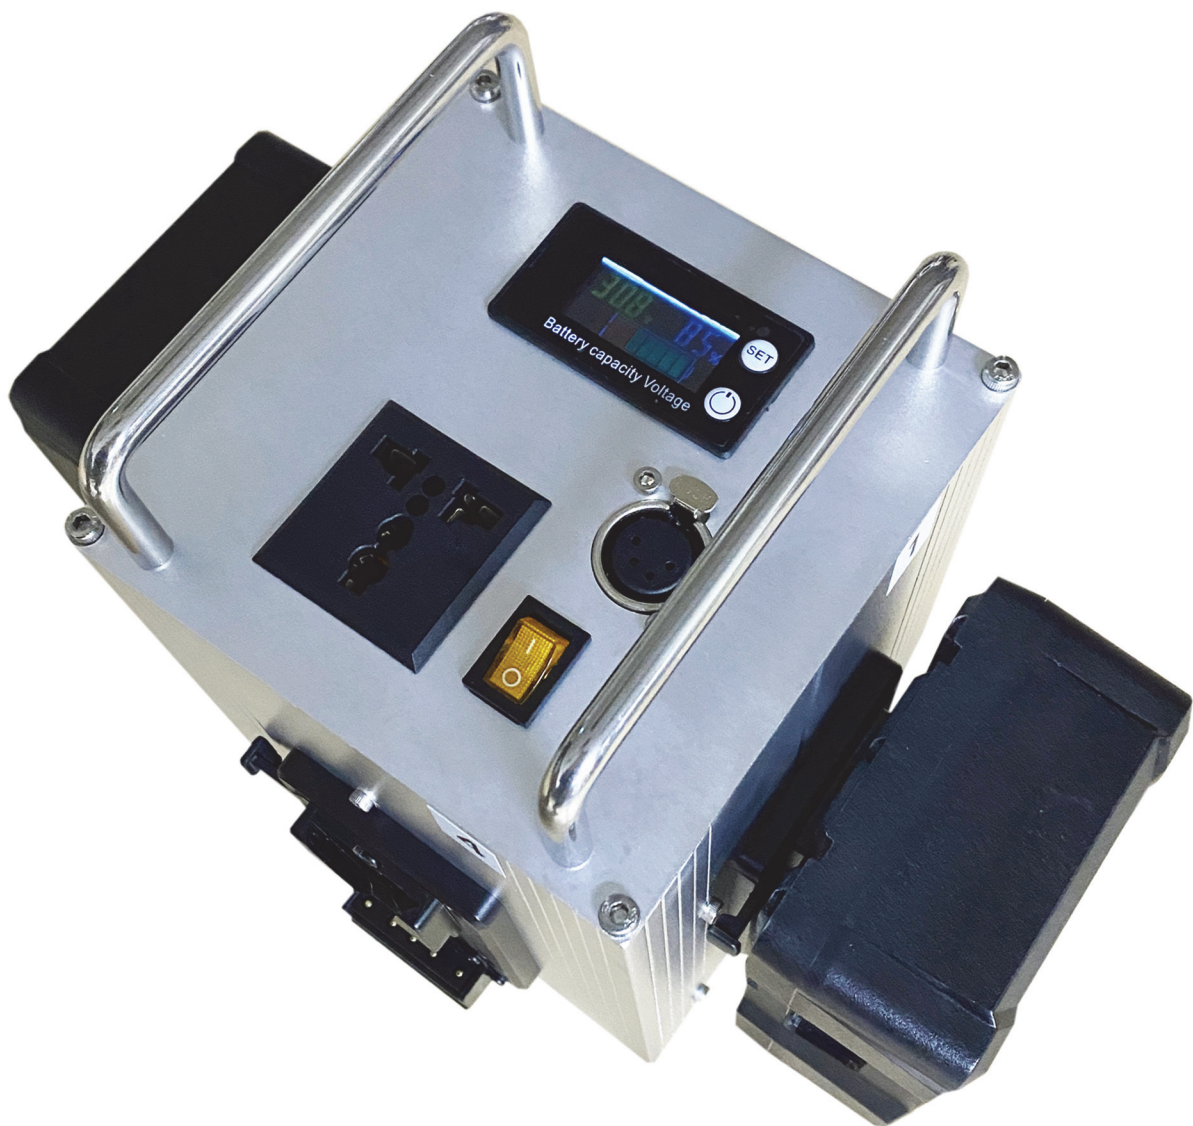

Matrix  Light

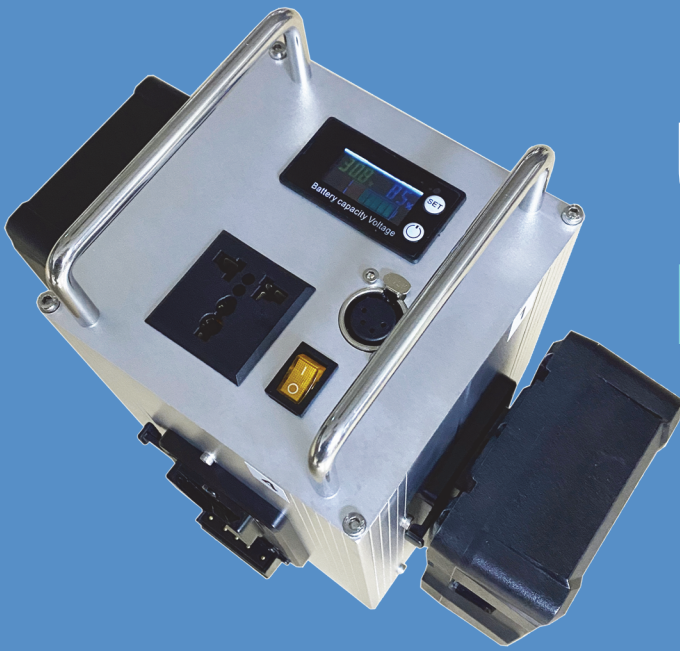

Ultimate Power !!

For StarLink Satellite Internet

ML-MPS1

Empowering Starlink everywhere:
The world's sole dedicated power solution.

Starlink Satellite Internet Connection via BP Batteries

The Matrix Light ML-MPS1 Power Supply is a premier power solution designed to drive Starlink satellite antennas using standard BP batteries. In emergency disaster scenarios or situations where broadcasting is hindered by network congestion, the ML-MPS1 enables broadcasters to deploy Starlink antennas anywhere in the world. It ensures a stable connection with speeds exceeding 5Mbps, allowing for seamless transmission of breaking news and live feeds. With its proven reliability, the ML-MPS1 serves as the ultimate support gear, capable of handling diverse mission-critical tasks in various broadcasting production environments.



Simple and Intuitive Control Interface

The Matrix Light ML-MPS1 Power Supply supports both AC 220V and DC 14.4V outputs, providing versatile power options for any environment. It features an intuitive LED indicator that accurately displays real-time battery levels, allowing operators to monitor power status at a glance.


Flight-Ready & Uninterrupted Live Broadcasting

Designed for mobility, the ML-MPS1 is compatible with flight-safe V-Mount BP batteries. Its hot-swappable design allows for easy battery replacement during operation without power loss. By powering both the Starlink satellite antenna and the camera simultaneously, it enables long-term standby and continuous broadcasting even in remote locations where AC power is completely unavailable.

Product Specifications

ML-MPS1 Power Supply Power	
Supply Input Range	24V DC / 16A / 400W (In case of Connect 4 BP Batteries)
Power Supply Output Range	14.4V DC / 4A / 48W MAX 220V AC / 2A / 400W Max
Power Input Connection	V mount BP Battery Plate
Weight	2.3Kg / 5lbs (Without BP Batteries)
Handling	Carrying Handle
Control	On-Board Controller / Battery Level Display
Housing Color	Silver / Black
Dimensions	136 x 136 x 244 mm / 5.4 x 5.4 x 9.6"
Protection Class / IP Rating	II / IP20

Product Dimension

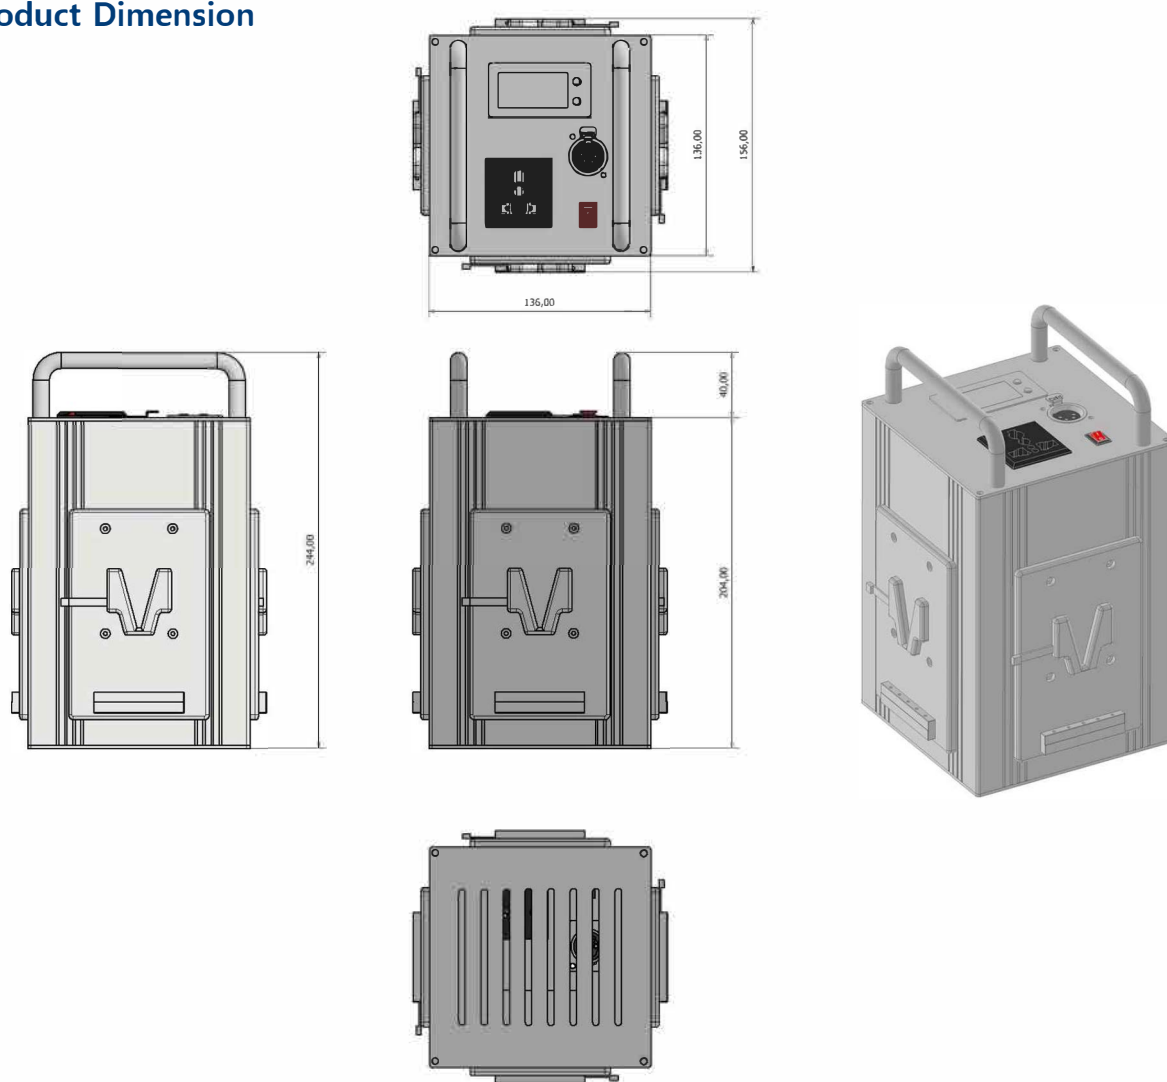

■ Contact Informations

Matrix Light Co., Ltd.
 F314, F315, F316 Goyang ArcBiz Knowledge Industry Complex
 63, Samwon-ro 1-gil, Deogyang-gu, Goyang-si, Gyeonggi-do,
 Republic of Korea

+82-10-7232-2888
 csmatrixlight@gmail.com
 www.matrixlight.com

■ Authorized Dealer

